
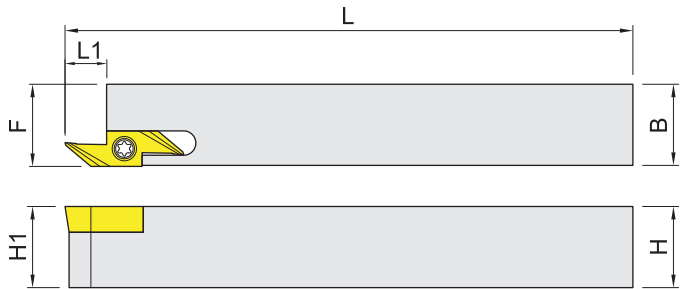


SAB_R


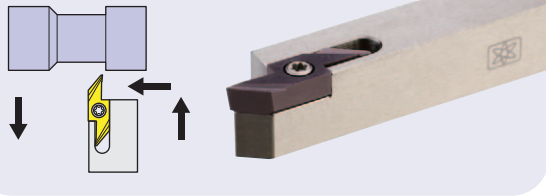


功能：後掃 Back turning

Right-hand shown

Item code	Dimensions,mm					Insert	Screw	Wrench	Weight Kg
	H (H1)	B	L	F	L1				
SABSR-1010K-40F	10	10	125	10.2	4.2	ABS15R..	MS3008A	ETF09	0.10
SABSR-1212K-40F	12	12	125	12.2	4.2				0.14
SABSR-1616K-40F	16	16	125	16.2	4.2				0.25
SABWR-0810K-40F	8	10	125	10.2	4.2	ABW15R..	MS3008B	ETF09	0.08
SABWR-1010K-40F	10	10	125	10.2	4.2				0.10
SABWR-1212K-40F	12	12	125	12.2	4.2				0.14
SABWR-1616K-40F	16	16	125	16.2	4.2				0.25
SABWR-2020K-40F	20	20	125	20.2	4.2				0.39
SABWR-2525M-40F	25	25	150	25.2	4.2				0.74
SABWR-1010K-50F	10	10	125	10.2	8.2	ABW23R..	MS3008A	ETF09	0.10
SABWR-1212K-50F	12	12	125	12.2	8.2				0.14
SABWR-1616K-50F	16	16	125	16.2	8.2				0.25
SABWR-2020K-50F	20	20	125	20.2	8.2				0.39
SABWR-2525M-50F	25	25	150	25.2	8.2				0.74

被切削材 Workpiece material	Steel 鋼	P	●	●	
	Stainless steel 不銹鋼	M	●	●	
	Cast iron 鑄鐵	K			●
	Non-ferrous metal 非鐵金屬	N			●

Insert Shape	Description	GRADE 材質			Dimensions,mm						
		Coated 塗層		Uncoated 無塗層	B	T	K	L	d	S	Re
		PR930	TC60M								
	ABS15R4005				2.8	4.2	30	15.4	7	3.97	0.05
	ABS15R4015		●		2.8	4.2	30	15.4	7	3.97	0.15
	ABW15R4005		●		4.7	4.2	45	15.4	7	3.97	0.05
	ABW15R4015				4.7	4.2	45	15.4	7	3.97	0.15
	ABW23R5005		●		4.7	8.2	40	23.4	7	3.97	0.05
	ABW23R5015	●		●	4.7	8.2	40	23.4	7	3.97	0.15